


Place SAM3426T1 profile block on side spindle 2.
 Place SAM 3426T2 profile block on side spindle 3.
 Place 4mm saw blade on side spindle 5, set to produce 4.00mm x15.00mm deep groove.
 Place SAM 3427T1 profile block on the first top spindle.
 Place SAM 3427T2 profile block on the second top spindle.

PRINTED COPY UNCONTROLLED

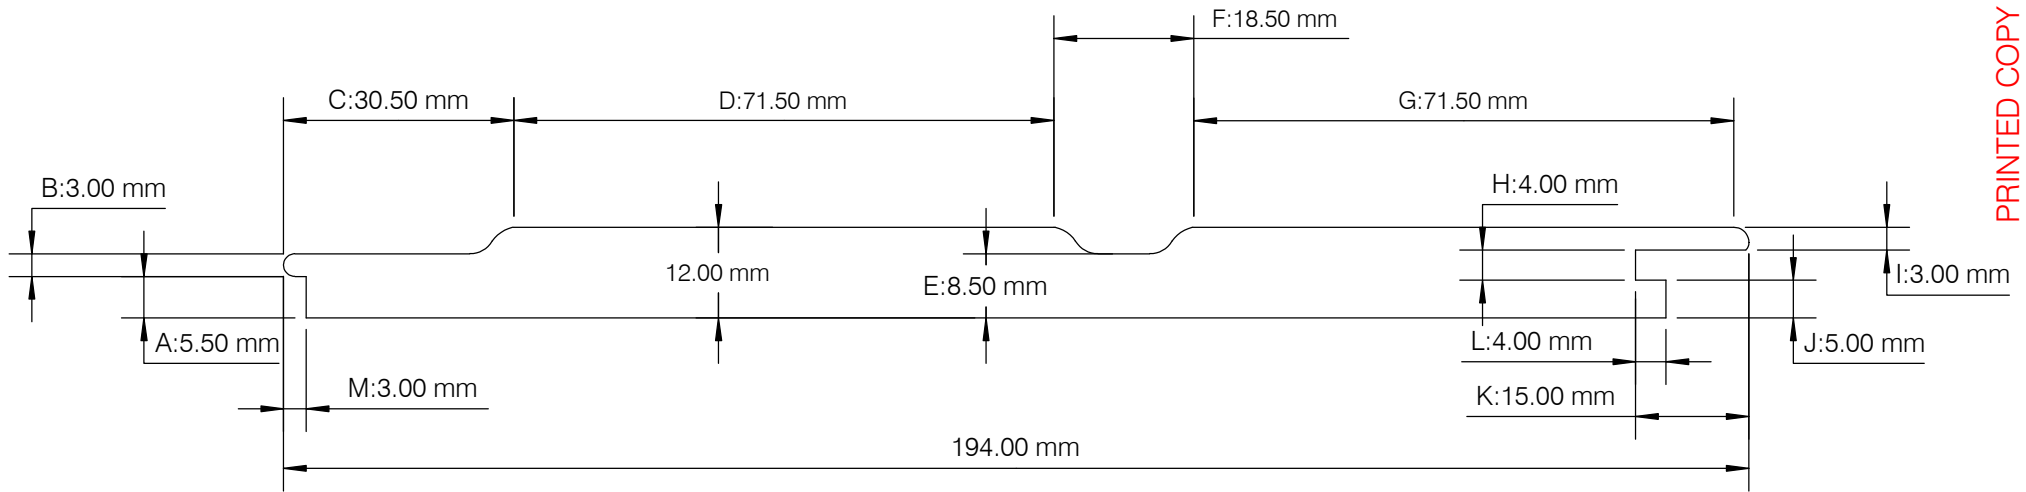

SAM TRIMAX Double Square Shiplap Cladding

MOULDER	ANY
PASSES	1



Newpark Industrial Estate
 Greystone Road, Antrim
 BT41 2RU
 T: +44 (0)28 9442 8288 F: +44 (0)28 9442 8244
 E: team@samonline.co.uk
 W: www.samonline.co.uk

PROFILE	DRAWN BY	Bart Sobecki	REV: 1
SAM 5556	DATE	06/11/2024	AUTH:
	SCALE	1:1	TOLERANCE +/- 0.5MM